

(21) Application No 8405714

(22) Date of filing 5 Mar 1984

(30) Priority data

(31) 58/030744

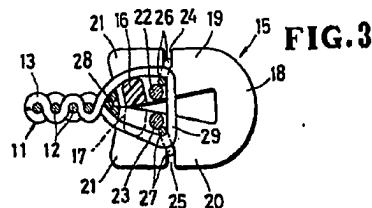

(32) 3 Mar 1983

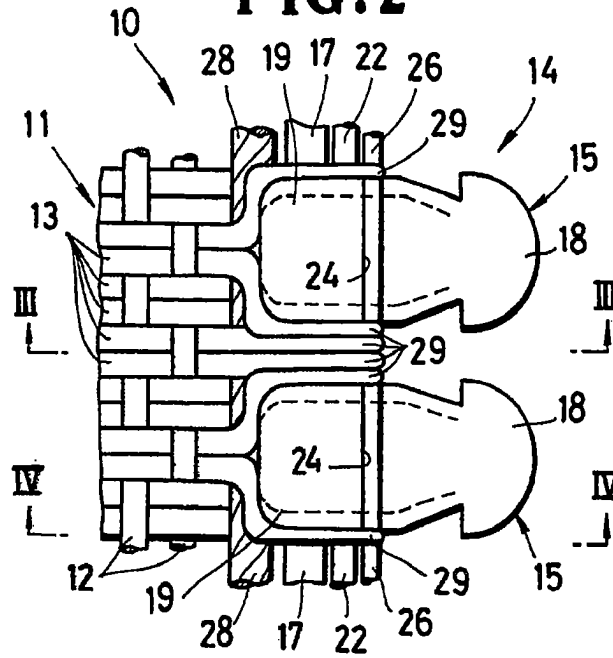
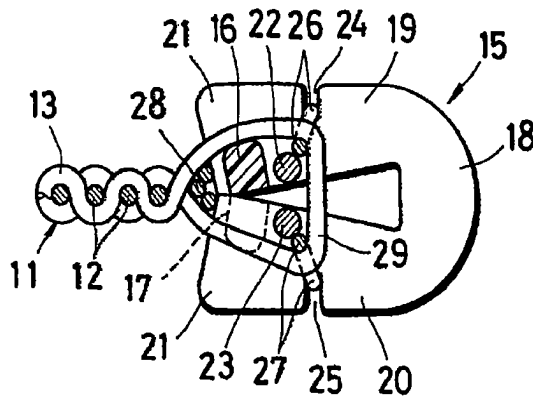
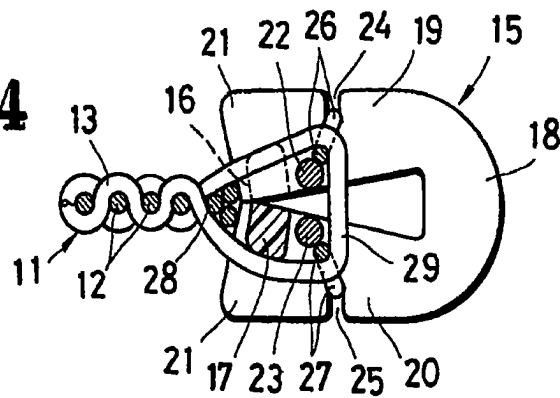
(33) JP

(51) INTCL<sup>3</sup>  
A44B 19/54(52) Domestic classification  
E2S 304 FC  
D1K 234 309 314 353 474(56) Documents cited  
GB A 2081806 GB A 2081376 EP A2 0088354(58) Field of search  
E2S(71) Applicants  
Yoshida Kogyo KK (Japan),  
No 1 Kanda Izumi-cho, Chiyoda-ku, Tokyo, Japan(72) Inventors  
Kiyoshi Takeshima  
Ryukichi Murai  
Yoshinori Nakada(74) Agent and/or Address for Service  
Marks & Clerk, 57-60 Lincoln's Inn Fields, London WC2A 3LS

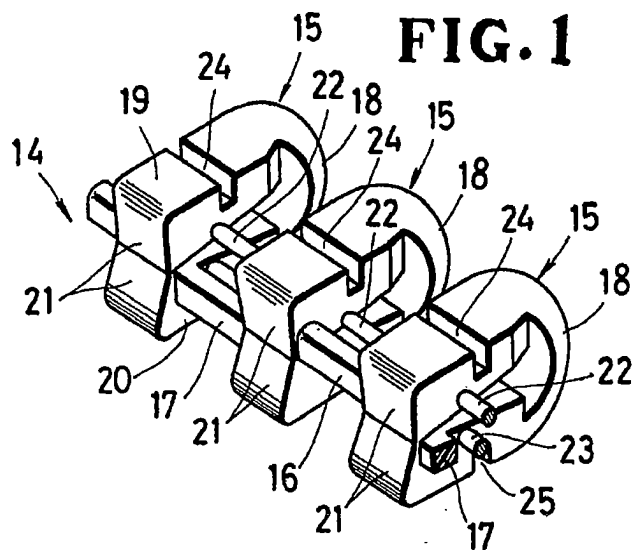
## (54) Slide fastener stringer

(57) A slide fastener stringer 10 comprises an elongate molded coupling element strip 14 woven into a stringer tape 11 along a longitudinal edge thereof. The strip includes a succession of laterally spaced coupling elements 15 each having a pair of first and second legs 19, 20, and a pair of series of first and second connecting portions 16, 17 extending respectively between alternate pairs of the first legs 19 and between alternate pairs of the second legs 20 in staggered relation with each other. A pair of connector threads 22, 23 is embedded in the legs of each coupling element. Each coupling element has a pair of grooves 24, 25 extending transversely through the legs on their outer sides. A pair of anchor threads 26, 27 is disposed in the grooves in the first and second legs, respectively, along the full length of the strips. A weft thread 13 of the tape has a plurality of loops 29 each encircling one of the first and second connecting portions, the connector threads, and the anchor threads between adjacent coupling elements, the connector threads being held out of contact with the weft loops.

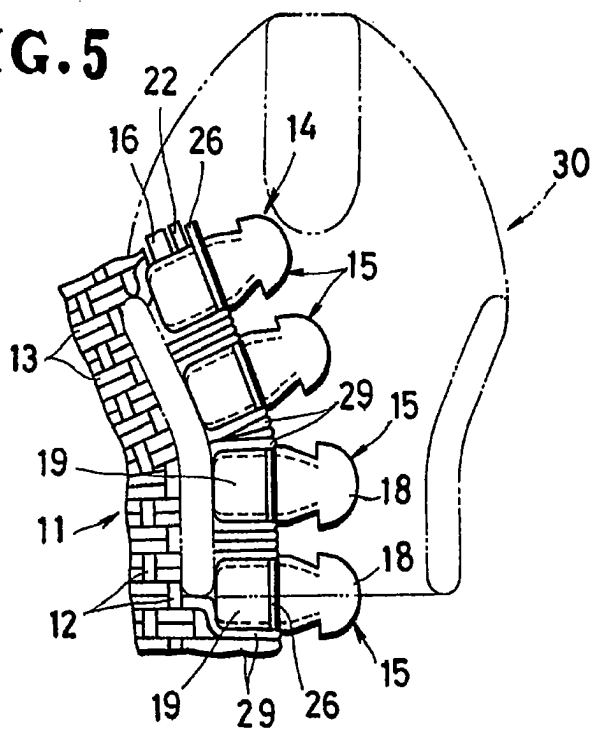


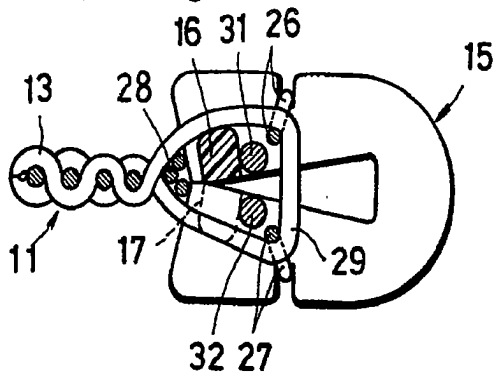
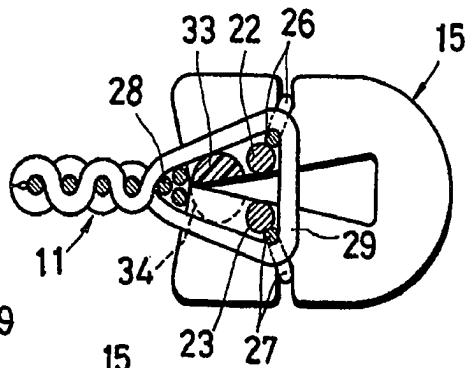
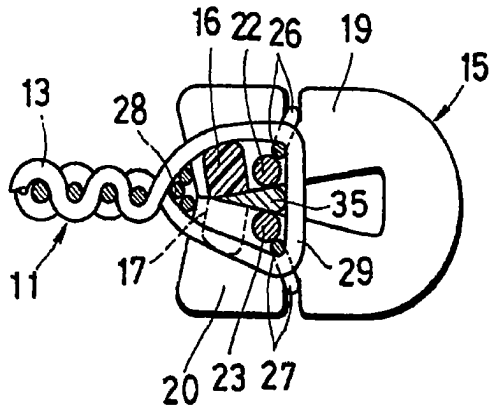
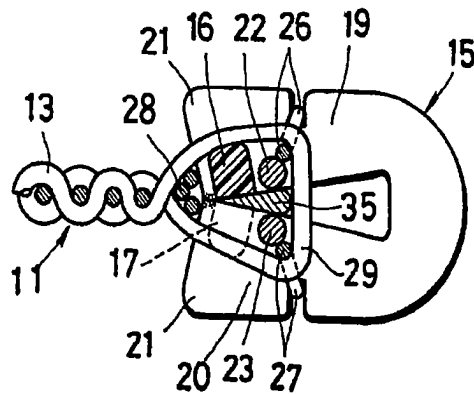
**FIG. 2****FIG. 3****FIG. 4**

**FIG. 1**



**FIG. 5**



**FIG. 6****FIG. 7****FIG. 8****FIG. 9**

## SPECIFICATION

## Slide fastener stringer

5 The present invention relates to slide fasteners, and more particularly to a slide fastener stringer including a woven stringer tape and an elongate strip of thermoplastic molded coupling elements woven into the stringer tape along a longitudinal edge thereof.

10 Various slide fastener stringers are known in which an elongate strip of thermoplastic molded coupling elements interconnected by molded connecting portions extending integrally with and between adjacent coupling elements, is attached to a woven stringer  
15 tape along a longitudinal edge thereof. One example of such known stringers is disclosed in Japanese Patent Laid-open Publication (Kokai) No. 57-31802 published on February 20, 1982. According to this disclosed slide fastener stringer, an elongate molded  
20 coupling element strip includes a plurality of laterally spaced coupling elements each having a pair of upper and lower legs, and a pair of series of first and second connecting portions extending integrally with and between alternate pairs of the upper legs and alternate  
25 pairs of the lower legs, respectively, in staggered relation to one another. The coupling element strip is secured by the plurality of loops of a single weft thread to the longitudinal edge of a stringer tape woven of a plurality of warp threads and the weft thread. The  
30 loops encircle alternate ones of the first and second connecting portions and a pair of anchor threads respectively disposed in a pair of grooves extending transversely of the upper and lower legs, respectively, in substantial alignment with the connecting portions.  
35 Since each weft loop is open widely in a direction perpendicular to the general plane of the stringer tape, it urges the anchor threads toward each other between adjacent coupling elements to hold the individual coupling elements firmly in position.  
40 However, because each connecting portion extends longitudinally of a respective one of the legs to the middle of the same, and because the anchor threads are urged by the weft loops to lie on and along the molded connecting portions, the stringer has a limited  
45 degree of flexibility which hinders smooth movement of a slider on the slide fastener.

It is believed possible by means of the present invention to provide a slide fastener stringer in which a row of spaced molded coupling elements is attached  
50 to a stringer tape with adequate firmness, and which has a desired degree of flexibility for smooth movement of a slider on the slide fastener.

According to the present invention, there is provided a slide fastener stringer comprising an elongate  
55 coupling element strip molded of a single material and having a succession of laterally spaced coupling elements, each of said coupling elements having a coupling head and a pair of first and second legs extending from said coupling head in a common  
60 direction and contacting each other at respective distal ends thereof; said strip further having a pair of series of first and second connecting portions interconnecting said coupling elements at said distal ends of said legs, said first connecting portions extending  
65 between alternate pairs of said first legs, said second

connecting portions extending between alternate pairs of said second legs in staggered relation to said first connecting portions, each of said connecting portions being fully interrupted only between every  
70 second pair of said legs; each of said coupling elements having a pair of grooves extending transversely through said first and second legs, respectively, on their respective outer sides, each of said grooves being disposed remotely from a respective one of said  
75 first and second connecting portions; a pair of anchor threads disposed in said first and second grooves, respectively, along the full length of said strip; and a stringer tape woven of a plurality of warp threads and a single weft thread, said weft thread having a plurality  
80 of loops disposed along a longitudinal edge of said stringer tape, each of said loops encircling one of said first and second connecting portions, and said anchor threads between an adjacent pair of said coupling elements, thereby securing said coupling elements to  
85 said longitudinal edge, characterized in that a pair of connector threads extends transversely of said coupling elements along the full length of said strip and only partially embedded in said first and second legs, respectively, said connector threads being exposed  
90 between adjacent coupling elements, each of said exposed connector threads being disposed adjacent to a respective one of said first and second connecting portions on the coupling head side of each coupling element, that each said groove is disposed remotely  
95 from a respective one of said connector threads extend through said weft loops and that said exposed connector threads and are held out of contact with said weft loops.

The invention will be described by way of examples with reference to the accompanying drawings, wherein:—

Figure 1 is a fragmentary perspective view of a molded coupling element strip;

Figure 2 is a fragmentary plan view of a slide fastener stringer embodying the present invention;  
105 Figure 3 is a cross-sectional view taken along line III-III of Figure 2;

Figure 4 is a cross-sectional view taken along line IV-IV of Figure 2;

Figure 5, appearing with Figure 1, is a schematic plan view of the stringer shown in Figure 2, the view showing the stringer as being bent in a slider; and

Figures 6 to 9 are views similar to Figure 3, showing various modifications according to the present invention.  
115

The present invention is particularly useful when embodied in a slide fastener stringer such as shown in Figure 2, generally indicated by the numeral 10.

The slide fastener stringer 10 comprises a stringer tape 11 woven of a plurality of warp threads 12 and a single weft thread 13, and an elongate coupling element strip 14 of thermoplastic synthetic resin woven into the stringer tape 11 along one longitudinal edge thereof in a known manner.

As shown in Figure 1, the elongate coupling element strip 14 includes a succession of laterally spaced coupling elements 15 interconnected by a pair of series of first and second connecting portions 16, 17. Each of the coupling elements 15 has a substantially U-shaped cross section and includes a coupling head  
130

19 and a pair of first and second legs 19, 20 extending from the coupling head 18 in a common direction. The first and second legs 19, 20 are spaced apart in substantially superimposed relation to one another and contact each other at respective heels or the distal ends 21, each leg having a varying width progressively reducing in a direction from its outer side to its inner side.

The first and second connecting portions 16, 17 are disposed adjacent to the heels 21 of the respective legs 19, 20 and extend transversely of the coupling elements 15 in longitudinal alignment with each other as viewed from the general plane of the stringer 10 (Figure 1). The first connecting portions 16 extend integrally with and between alternate pairs of the first legs 19 and the second connecting portions 17 extend integrally with and between alternate pairs of the second legs 20 in staggered relation to the first connecting portions 16. Thus, each of the first and second connecting portions 16, 17 is fully interrupted only between every second pair of the first and second legs 19, 20. The connecting portions 16, 17 has a thickness smaller than the thickness of the respective legs 19, 20 and has a substantially rectangular cross section, as shown in Figures 3 and 4.

The coupling element strip 14 is molded of a single thermoplastic synthetic resin material and is continuously produced on an extrusion molding machine (not shown). The strip 14, prior to being bent into U-shaped cross section ready for attachment to the stringer tape 11, has a zigzag or meandering structure as understood from Figure 1.

A pair of connector threads 22, 23 extends transversely of the coupling elements 15 along the full length of the coupling element strip 14. The connector threads 22, 23 are normally parallel to and spaced a short distance from the first and second connecting portions 16, 17 respectively, toward the coupling heads 18 of the coupling elements 15. The connector threads 22, 23 are only partially embedded in the first and second legs 19, 20 simultaneously with the molding of the strip 14 such that they lie at confronting surfaces of the first and second legs 19, 20 of each coupling element 15 as shown in Figures 3 and 4.

Each coupling element 15 has a pair of grooves 24, 25 extending transversely through the first and second legs 19, 20, respectively, on their outer sides. The grooves 24, 25 are parallel to and spaced from the connector threads 22, 23 toward the coupling heads 18 of the coupling elements 15. A pair of anchor threads 26, 27 extends through the grooves 24 of the first legs 19 and through the grooves 25 of the second legs 20, respectively, along the full length of the coupling element strip 14. A guide cord 28 extends between the stringer tape 11 and the coupling element strip 14 along the full length of the strip 14. The guide cord 28 is composed of three threads twisted together and is thicker than the warp and weft threads 12, 13 of the stringer tape 11.

As shown in Figures 2 to 4, the weft thread 13 of the woven stringer tape 11 has a plurality of loops 29 disposed along the longitudinal edge of the tape 11, each loop 29 encircling the guide cord 28, one of the first and second connecting portions 16, 17, the connector threads 22, 23, and the anchor threads 26,

27 between an adjacent pair of the coupling elements 15, 15, thereby securing the coupling elements 15 to the longitudinal tape edge. More specifically, each of the loops 29 extends arcuately between the guide cord 28 and one of the anchor threads 26, 27 across a corresponding one of the connecting portions 16, 17, then vertically between the anchor threads 26, 27, and then straightly between the other anchor thread 27 and the guide cord 28, thereby defining a substantially triangular space expanding progressively in a direction from the guide cord 28 to the anchor threads 26, 27. The connector threads 22, 23 are held out of direct contact with the loops 29 of the weft thread 28.

This arrangement produces the following advantages. Since each loop 29 of the weft thread 13 is open widely, perpendicularly to the general plane of the stringer tape 11, with its maximum height at the anchor threads 26, 27, urging the anchor threads 26, 27 toward each other between adjacent coupling elements 15 to hold the individual coupling elements 15 firmly in position. With the thick guide cord 28 extending through the loops 29 of the weft thread 13, the coupling element strip 14 is secured to the longitudinal tape edge with an increased degree of firmness. Because every pair of coupling elements 15 is interconnected by one of the first and second connecting portions 16, 17 and the two connector threads 22, 23, all of which are inextensible, proper and uniform spaces between the coupling elements 15 are maintained. With the molded connecting portions 16, 17 having their connection adjacent to the heels 21 of the respective legs 19, 20, and with the flexible connector threads 22, 23 held out of direct contact with the weft thread loops 29, as shown in Figure 5, the coupling element strip 14 is allowed to bend arcuately away from the coupling element strip of a mating stringer (not shown) in conformity with the Y-shaped guide channel of a slider 30 as two of the stringers 10 are engaged and disengaged by the slider 30 to open and close a slide fastener (not shown), thus enabling smooth threading of the coupling element strips into and out of the slider's guide channel.

Figure 6 illustrates a modified woven slide fastener stringer having a modified coupling element strip on which a pair of connector threads 31, 32 extends parallel to and in contact with the first and second connecting portions 16, 17, respectively, between adjacent coupling elements 15. The connector threads 31, 32 have a radius of curvature slightly greater than that of the connecting portions 16, 17 during pivoting of the strip as shown in Figure 5. The connector threads 31, 32 extend without interference with the weft loops 29 and with the anchor threads 26, 27. With this arrangement, the coupling element strip can be bent easier than the strip 14 shown in Figure 1, in response to movement of the slider (Figure 5), ensuring smooth threading of the slider on the coupling elements 15.

A modified slide fastener stringer shown in Figure 7 is similar to the stringer 10 of Figure 2, but is different therefrom in that a molded coupling element strip includes a pair of series of first and second connecting portions 33, 34 (only one pair being illustrated) having a substantially segmental shape in cross

section, and having a thickness smaller than the connecting portions shown in Figure 3 at 16, 17. The coupling element strip thus constructed provides a greater resiliency than the strip 14 of Figure 2.

- 5 Another modified slide fastener stringer shown in Figure 8 is substantially the same as the stringer of Figure 3 with the exception that a stuffer warp 35 extends through the loops 29 of the weft thread 13 and is sandwiched between the first and second legs 10 19, 20 of the coupling elements 15. Due to the elasticity of the stuffer warp 35, the coupling elements 15 can be attached to the longitudinal tape edge with an increased degree of firmness, thus providing an increased coupling strength when they 15 are mashed with the coupling elements of a mating coupling element strip. The first and second legs 19, 20 may be joined at the respective distal ends or heels 21, 21 by being integrally fused together as shown in Figure 9, to thereby holding the stuffer warp 35 stably 20 in position. With this arrangement, a firm and stable attachment of the coupling elements 15 to the longitudinal tape edge can be achieved.

#### CLAIMS

1. A slide fastener stringer comprising:
  - 25 (a) an elongate coupling element strip molded of a single material and having a succession of laterally spaced coupling elements, each of said coupling elements having a coupling head and a pair of first and second legs extending from said coupling head 30 in a common direction and contacting each other at respective distal ends thereof;
  - (b) said strip further having a pair of series of first and second connecting portions interconnecting said coupling elements at said distal ends of said legs, said 35 first connecting portions extending between alternate pairs of said first legs, said second connecting portions extending between alternate pairs of said second legs in staggered relation to said first connecting portions, each of said connecting portions being fully interrupted only between every 40 second pair of said legs;
  - (c) a pair of connector threads extending transversely of said coupling elements along the full length of said strip and only partially embedded in 45 said first and second legs, respectively, said connector threads being exposed between adjacent coupling elements, each of said exposed connector threads being disposed adjacent to a respective one of said first and second connecting portions on the 50 coupling head side of each coupling element;
  - (d) each of said coupling elements having a pair of grooves extending transversely through said first and second legs, respectively, on their respective outer sides, each of said grooves being disposed 55 remotely from a respective one of said first and second connecting portions and from a respective one of said connector threads;
  - (e) a pair of anchor threads disposed in said first and second grooves, respectively, along the full 60 length of said strip; and
  - (f) a stringer tape woven of a plurality of warp threads and a single weft thread, said weft thread having a plurality of loops disposed along a longitudinal edge of said stringer tape, each of said loops 65 encircling one of said first and second connecting

portions, said exposed connector threads, and said anchor threads between an adjacent pair of said coupling elements, thereby securing said coupling elements to said longitudinal edge, said exposed 70 connector threads being held out of contact with said weft loops.

2. A slide fastener stringer according to claim 1, including a guide cord disposed longitudinally between said stringer tape and said coupling element 75 strip and extending through said weft loops, said guide cord being thicker than said warp and weft threads.

3. A slide fastener stringer according to claim 2, said guide cord including a plurality of threads 80 twisted together.

4. A slide fastener stringer according to claim 1, each said exposed connector thread being spaced from said respective one of said first and second connecting portions toward said coupling head of 85 each coupling elements.

5. A slide fastener stringer according to claim 1, each said exposed connector thread extending in contact with said respective one of said first and second connecting portions and being held out of 90 contact with a respective one of said anchor threads.

Printed in the United Kingdom for Her Majesty's Stationary Office, 6818836, 10/84, 18998. Published at the Patent Office, 25 Southampton Buildings, London WC2A 1AY, from which copies may be obtained.